

Installation Instructions.

Door card removal:

1. Plastic trim under the chrome door handle needs to be popped off.
2. Cover trim over the grab handle needs to be removed.
3. Remove 3 screws from under each of the handles
4. Gently twist & pull out rubber grommet on RHS of the door trim.
5. Carefully pull the door trim away from the door starting at the bottom and working your way around the sides.
6. Once off the door you will need to remove handle cables by gently twisting & pulling out of socket. Disconnect electrical plugs from the door handle light, the puddle light & from under the window/mirror switch module.

Once the door card is removed , you will need to unwrap or gently remove the plastic liner away near the door lock actuator (unwrap & then taping back up is easiest).

Once it's open you can get your hand around to the plug, firmly squeeze the lock pin/tab on the connector to the actuator and gently wriggle & pull.

Plug new harness inline, it can only go one way. Feed the harness back through the plastic liner where it suits the best, connect to the module that came in the pack & adhere it somewhere non obtrusive.

Remove the two plugs that go into window switch/ mirror module. Connector tabs can be tight the first time & need a good pull to get out.

Plug the new harness in between the OEM plugs & back into the window/mirror module. Reassemble making sure new harness & module is not obstructing fitment.

1. Plastic trim under the chrome door handle needs to be popped off.



2. Cover trim over the grab handle needs to be removed.

3. Remove 3 screws from under each of the handles



4. Gently twist & pull out rubber grommet on RHS of the door trim.





4. Remove rubber grommet,
lube for easier install/removal

5. Carefully pull the door trim away from the door starting at the bottom and working your way around the sides.




6. Once off the door you will need to remove handle cables by gently twisting & pulling out of socket. Disconnect electrical plugs from the door handle light, the puddle light & from under the window/mirror

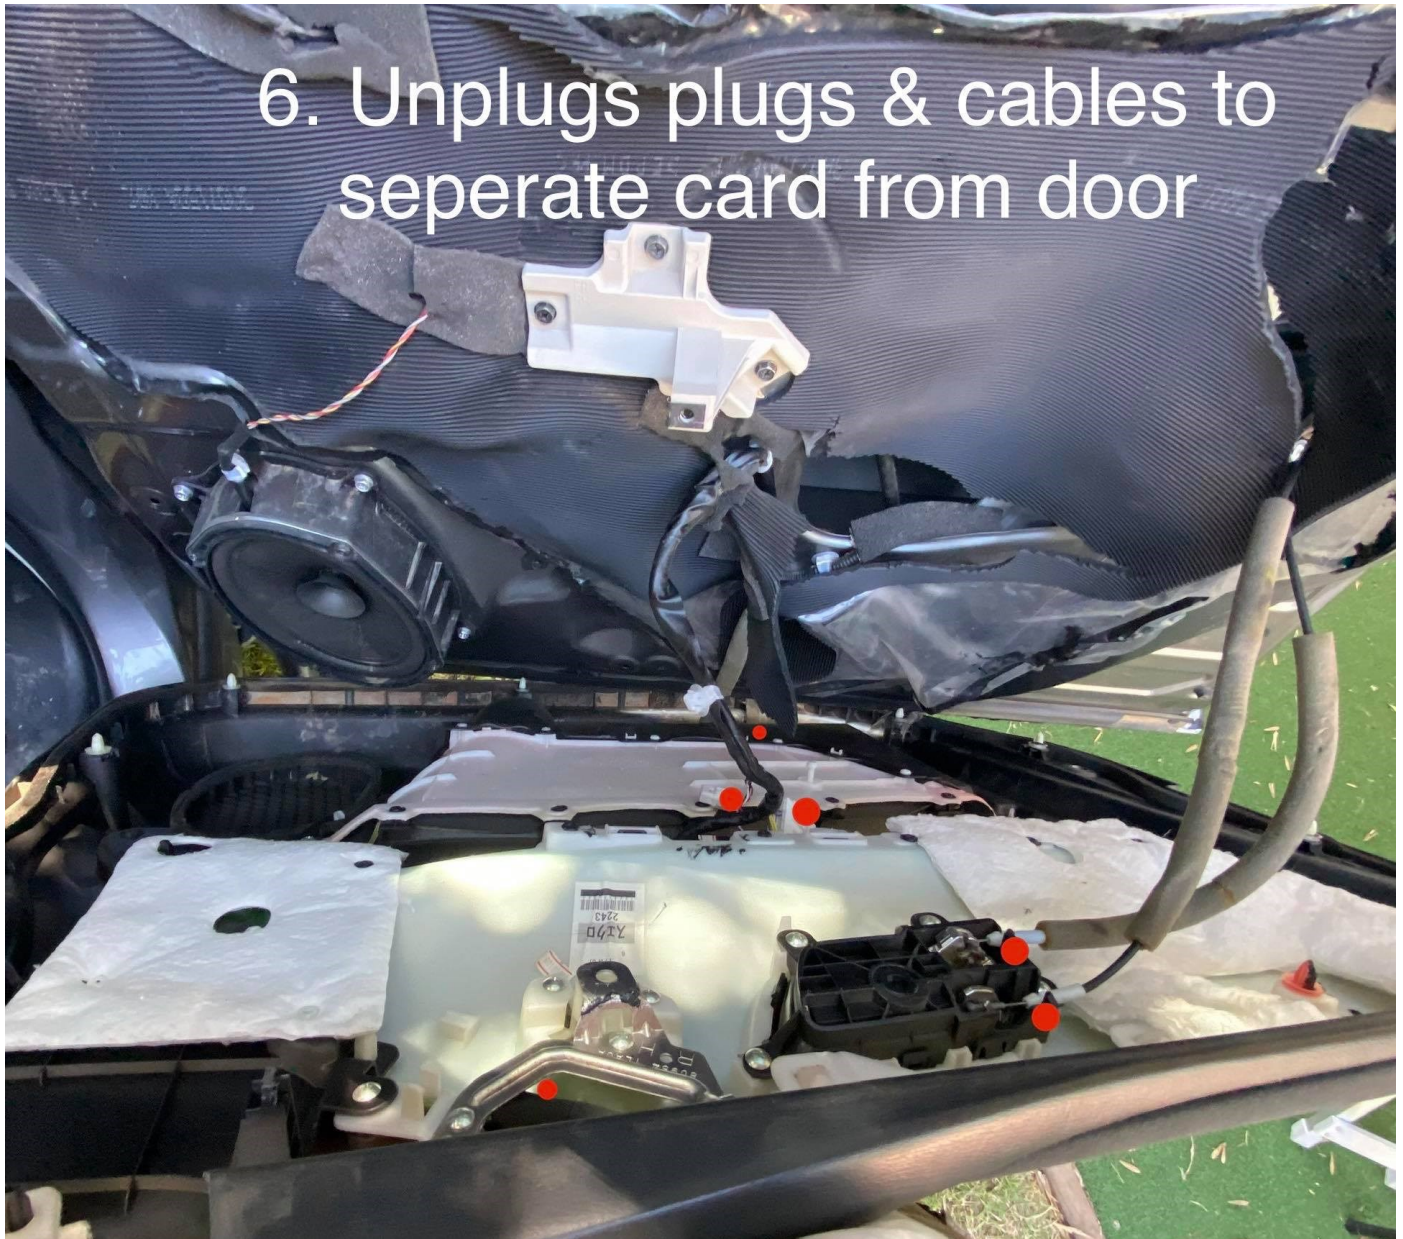

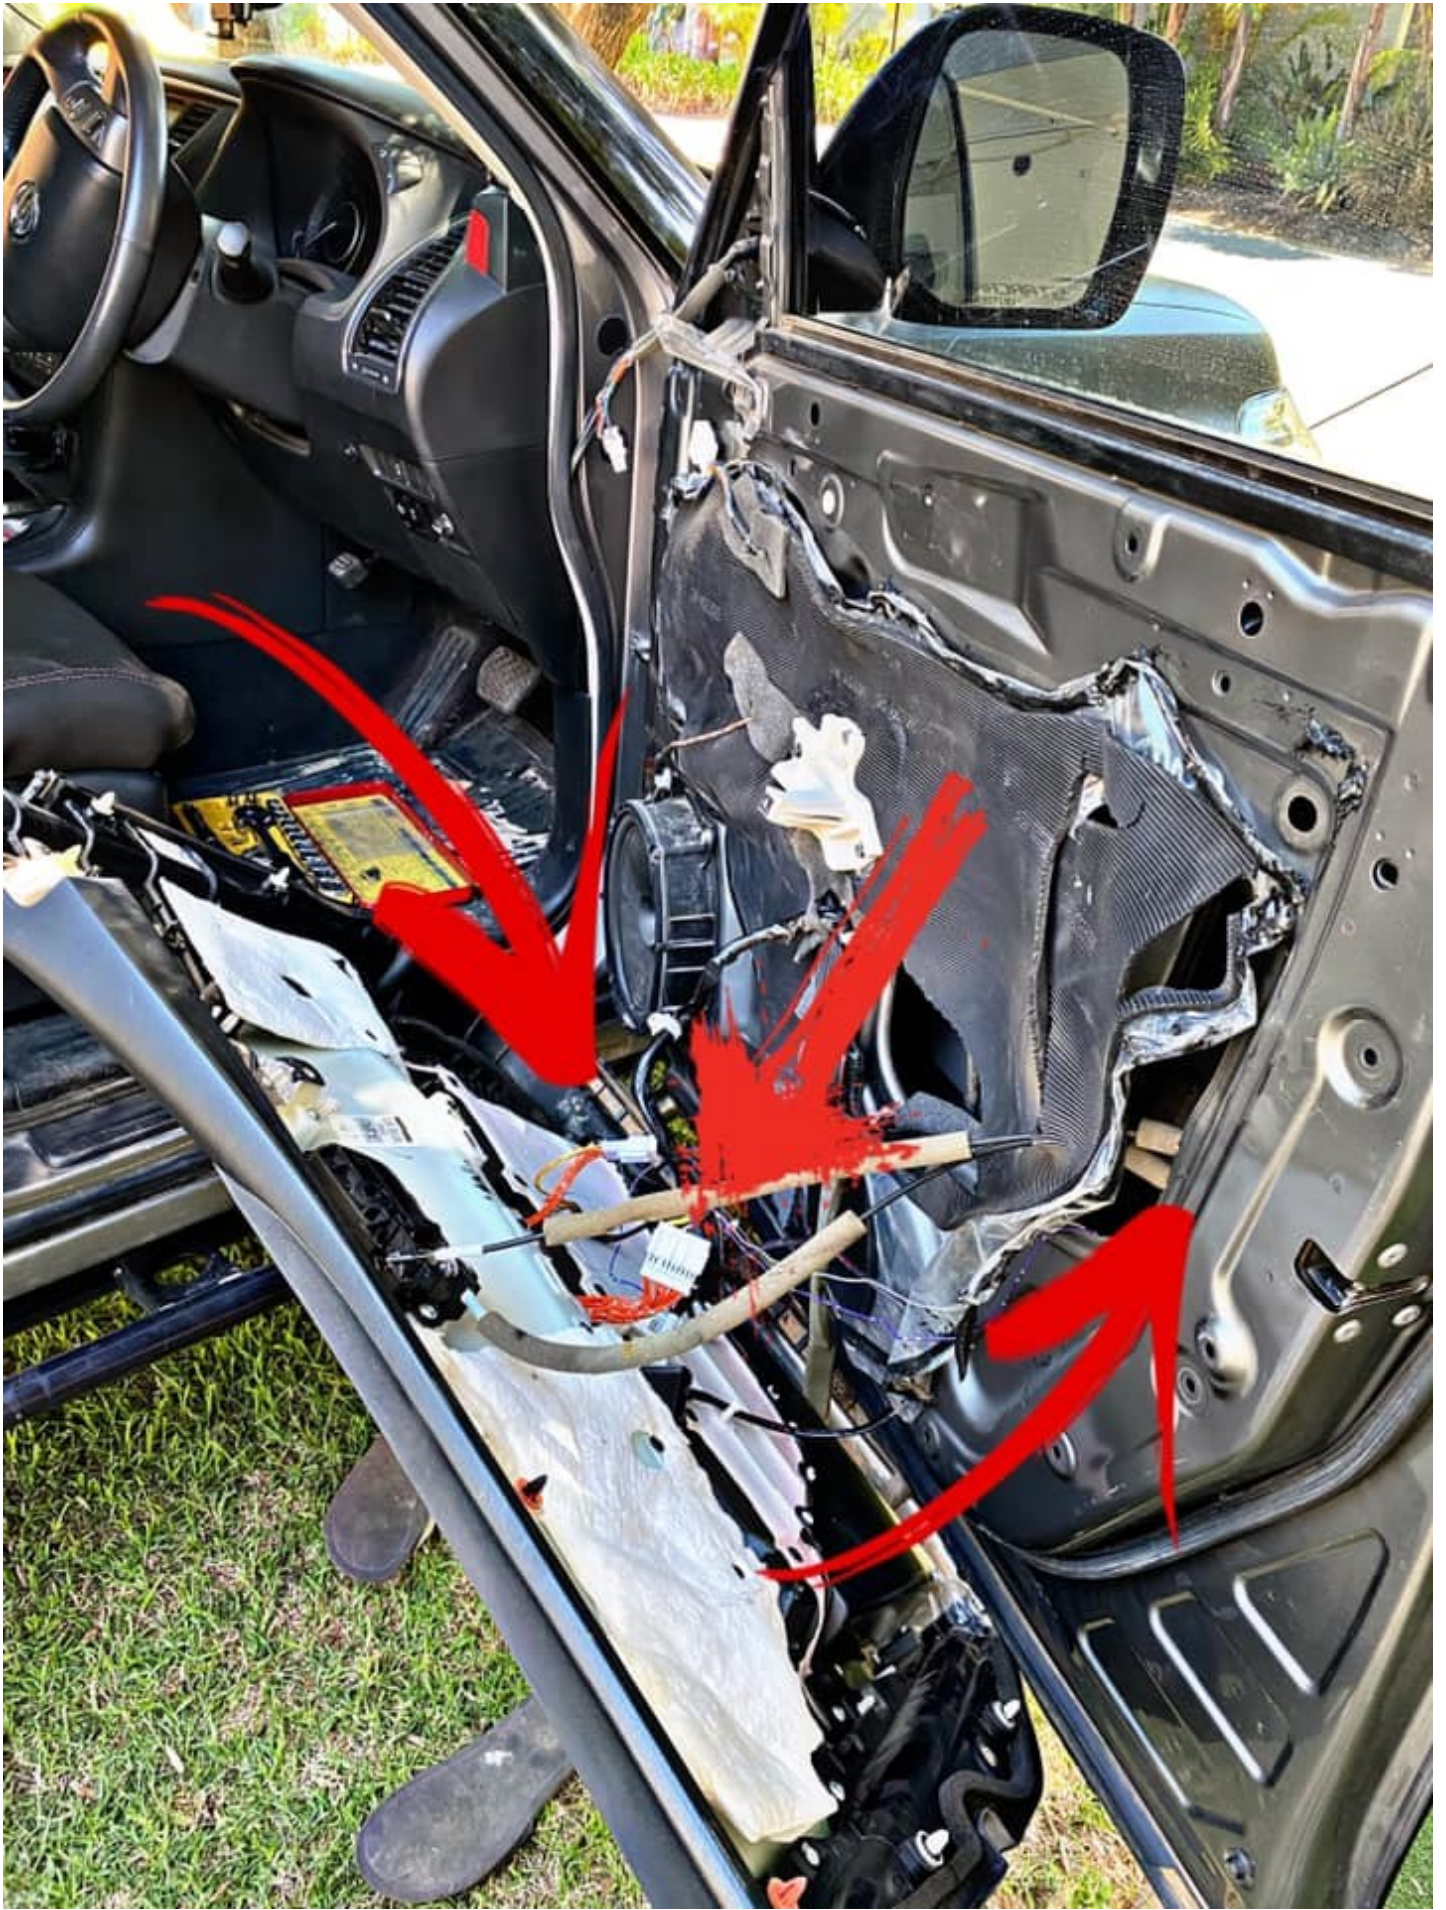

Remove lock actuator
plug & connect I line
plugs to it. Be sure to
reposition where it won't
get caught on the
window

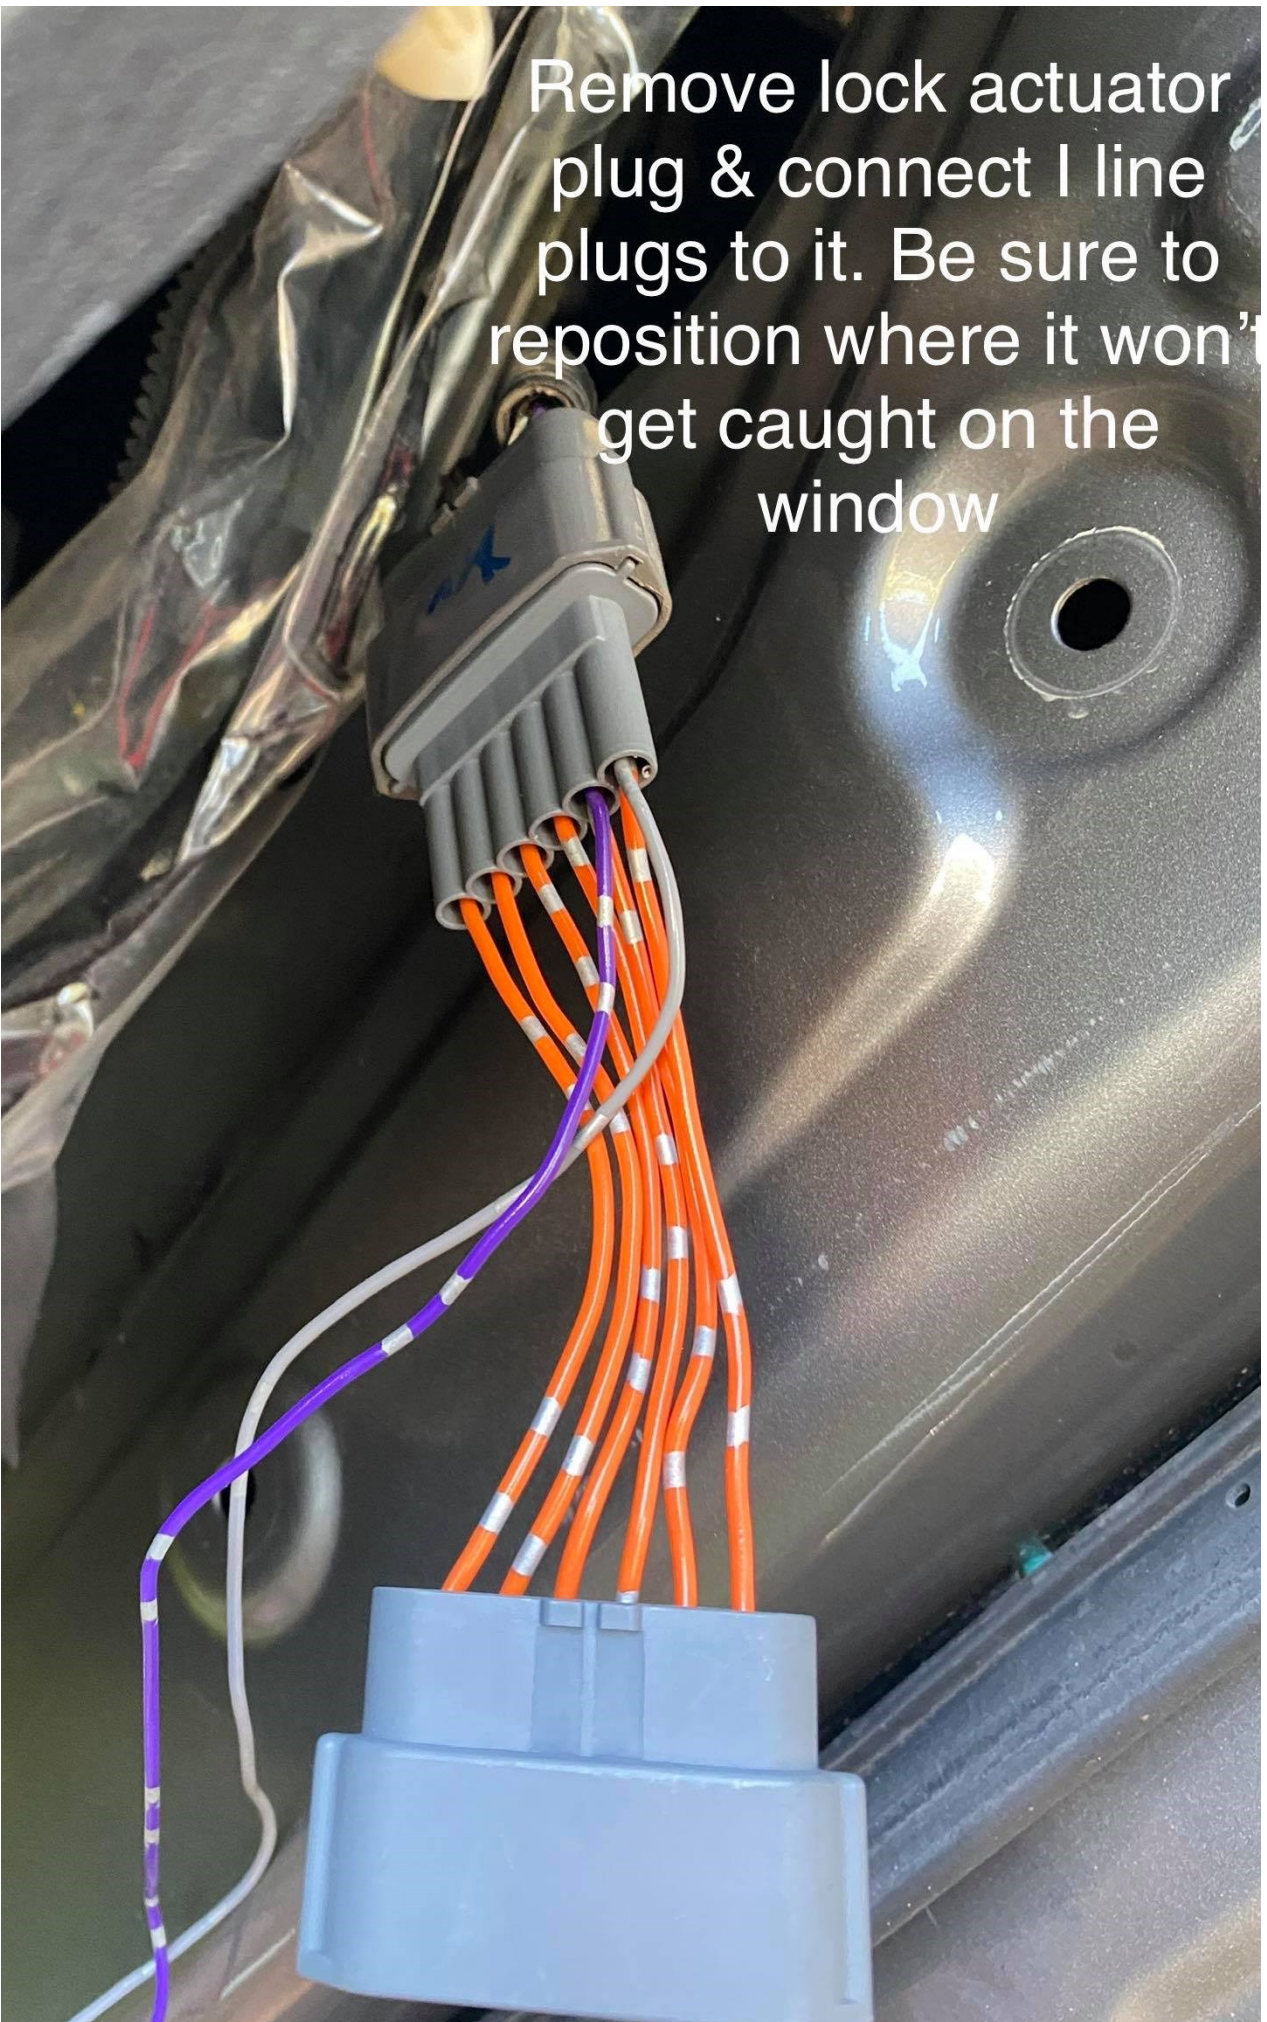

New harness plugged into old harness and mirror/window module





Remove these original plugs from the base of the mirror/window switch module & plug new plugs in, then connect factory harness to new harness plugs